


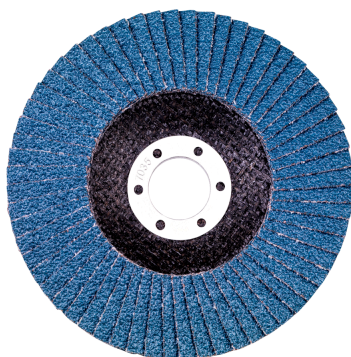

Representative picture

Quality class zirconia alumina "Novoflex"

- Suitable for rough and intermediate grinding in all fields of metalworking including stainless steel, steel, cast iron, and sheet steel
- Quality Novoflex: powerful entry-level class
- Uniform grinding capacity
- Cool grinding
- Uniform grinding result, comfortable grinding with only low vibration
- Most suitable for processing stainless steels
- Maximum working speed 80 m/s
- Tilted version: angle of attack 7-9°

Diameter x bore	Grit	Version	Maximum speed	Sales unit / packaging unit	Order No.
178 x 22.23 mm // 7 x 7/8 "	P 40	sloping	8500 rpm	1 / 10	623112000
178 x 22.23 mm // 7 x 7/8 "	P 60	sloping	8500 rpm	1 / 10	623114000
178 x 22.23 mm // 7 x 7/8 "	P 80	sloping	8500 rpm	1 / 10	623115000
115 x 22.23 mm // 4 1/2 x 7/8 "	P 40	sloping	13300 rpm	1 / 10	623175000
115 x 22.23 mm // 4 1/2 x 7/8 "	P 60	sloping	13300 rpm	1 / 10	623176000

Diameter x bore	Grit	Version	Maximum speed	Sales unit / packaging unit	Order No.
115 x 22.23 mm // 4 1/2 x 7/8 "	P 80	sloping	13300 rpm	1 / 10	623177000
115 x 22.23 mm // 4 1/2 x 7/8 "	P 120	sloping	13300 rpm	1 / 10	623178000
125 x 22.23 mm // 5 x 7/8 "	P 40	sloping	12200 rpm	1 / 10	623195000
125 x 22.23 mm // 5 x 7/8 "	P 60	sloping	12200 rpm	1 / 10	623196000
125 x 22.23 mm // 5 x 7/8 "	P 80	sloping	12200 rpm	1 / 10	623197000
125 x 22.23 mm // 5 x 7/8 "	P 120	sloping	12200 rpm	1 / 10	623198000